
## **PELICAN**





REMOTE AREA LIGHTING SYSTEMS ■ TACTICAL/DUTY ■ SAFETY APPROVED LIGHTS ■ LED/RECOIL ■ DIVE



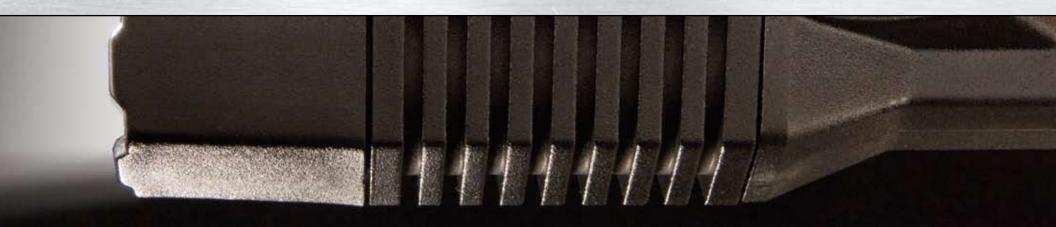

### The Future of Lighting.



By now we have all heard about the expected LED revolution in lighting. We believe with the environmentally responsible factors, energy efficiency and durability of LED lights, what we have seen in development over

the last 5 years will pale in comparison to what is right around the corner. Pelican is leading the way by positioning itself to be a major company in developing products utilizing this great new technology.

By now you've seen LEDs in traffic lights, auto tail lights and, of course, Pelican flashlights. Our Advanced Area Lighting Group (AALG) is a leading innovator in Remote Area Lighting. One of the most dramatic examples was the use of our

RALS 9430 on the wing of US Airways flight 1549 in the Hudson River. Jet fuel had to be pumped out of the aircraft at night and generator based lighting was too dangerous and impractical.

AALG has also changed the way our warfighters use night vision technology. With the 9430IR, invisible infrared LED light allows our troops to observe the enemy

through hundreds of yards of complete darkness, while at the same time the enemy has no idea they are being illuminated. This is just the beginning of the LED revolution and Pelican's position within it. Soon, entire LED walls will produce clean, white lightwith no lamp modules, wires or reflectors.

And using less energy will literally make the world a brighter place. We are excited to be working with you in creating this new market.

Lyndon Faulkner President & CEO



Photo courtesy Lt. John Cassidy, FDNY

> CONTENTS

2

31

#### **MARKETS SERVED**



LAW ENFORCEMENT



**INDUSTRIAL** 



DIVE



**MILITARY** 



**OUTDOOR** 



#### **KEY TO SYMBOLS**













\*Dust and water ingress protection rated to IP67 – dust tight and protected against the effects of temporary immersion underwater (1 meter for 30 minutes)

## **Message from the President and CEO**

PELICAN LIGHTS		
Remote Area Lighting Systems	9430   9450B   🚺 9460   🕦 9500   🕦 9470	4-5
Personal	1900   2140   2300  2340	6
Medium Duty	1800   1820   2000   2400   2430   2450	7-8
Light Kits	2250   3390	9
Tactical/Duty	2320   3320   8040   8050	10
Tactical/Duty LED	2330   🕦 2360   2390   3330   7060   🕦 8060	11-12
LED and Recoil™	1830   1930   2130   2220   🕠 2365   2010   2020 2410   2460   3610   3660	13-16
HeadsUp Lite <sup>™</sup>	2600   2610   2620   2640   2680   2690	17-18
Specialty	3700   3750   3850	19-20
Nemo <sup>™</sup> Dive Series	1900N   🚺 1960N  2000N   2010N   2400N   2410N   4300N	21-22
Heavy Duty	4000	23
nt Mounting Systems/Holsters/Miscellar	neous	24

Light Mounting Systems/Holsters/Miscellaneous	24

Helmet Light Holders	25
The Anatomy of a Safety Approved Flashlight	26

no Anatomy of a Galoty Approx	ou i luomigni	

Light Specification Charts	27-30

**Private Label Program/Meet the Other Half of Pelican** 

**HOW TO USE THIS CATALOG** LIGHTS CATALOG | 4

New this year is our reformatted digital catalog. This new catalog is viewable in your office or on the go. Conveniently designed to print on standard Letter size paper, it can also be stored on your desktop for quick reference.

If viewed with a computer that has an internet connection, live updates with the most current specs can be viewed instantaneously.

Export •

(1 of 1)

MEDIUM DUTY LIGHTS

Start Meeting +

II O

Combine Files -

Options >

Message from the President and CEO

One Click Product Table

How To Use This

Catalog Remote Area Lighting

Systems

Light Kits

Medium Duty

Tactical LED LED and Recoil

Nemo Dive Series

Light Mounting

Systems/Holsters/

Helmet Light Holders

Light Speccifications Private Label Program/

Meet the Other Half of

Miscellaneous

The Anatomy of a Safety Approved

Flashlight

Pelican

0

Personal

Tactical

HeadsUp Specialty

Heavy Duty

000


Light

Side

**Bar Page** 

**Navigation** 

Category

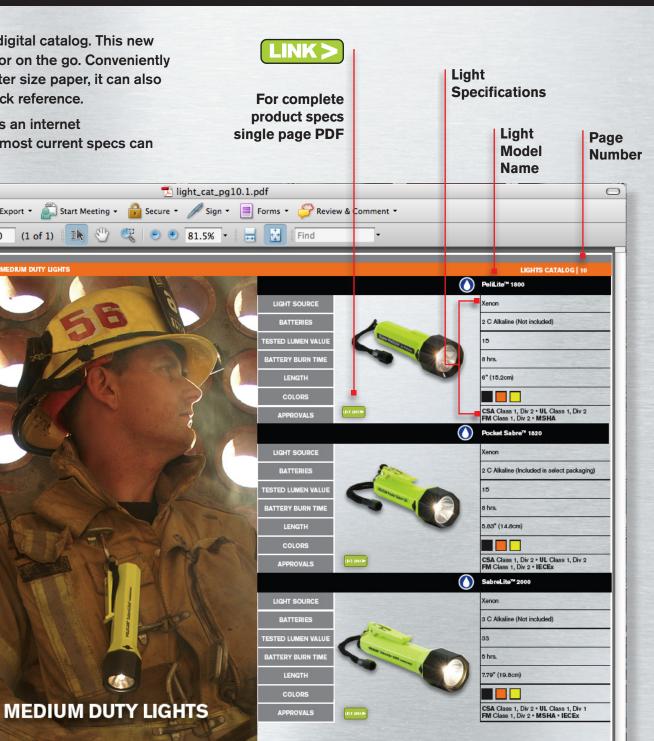

REMOTE AREA LIGHTING SYSTEMS LIGHTS CATALOG | 5





#### FI 9430 Remote Area Lighting System



BATTERIES

TESTED LUMEN VALUE

**BATTERY BURN TIME** 

LENGTH

**COLORS** 

**APPROVALS** 



High Flux LED

12v Rechargeable, Sealed

2000 (High) / 1000 (Low)

8 hrs. (High) / 15 hrs. (Low)

15.75" (40cm) 32.28" (82 cm) Mast Height Extended



**RoHS** Compliant





UNRETOUCHED PHOTOS

9450B Remote Area Lighting System

ALSO AVAILABLE 9430IR

www.pelican.com for details



LIGHT SOURCE

BATTERIES

TESTED LUMEN VALUE

BATTERY BURN TIME

LENGTH

COLORS

APPROVALS



LED

Rechargeable Sealed Lead (500 cycles, IATA approved)

1280

17 hrs. (Total output) / 9 hrs. (Peak output)

22" (55.9 cm) 83" (210.7 cm) Mast Height Extended



**RoHS** Compliant

REMOTE AREA LIGHTING SYSTEMS (RALS) REMOTE AREA LIGHTING SYSTEMS

LIGHTS CATALOG | 6



### 9460 Remote Area Lighting System

9400 Remote Area Lighting System	
High Flux LED	LIGHT SOURCE
12v Rechargeable, Sealed	BATTERIES
4000 (High) / 2000 (Low)	TESTED LUMEN VALUE
7 hrs. (High) / 14 hrs. (Low)	BATTERY BURN TIME
22" (55.9 cm) 70.87" (179.9 cm) Mast Height Extended	LENGTH
	COLORS
RoHS Compliant	APPROVALS



9470 Remote Area Lighting System

High Flux LED

12v Rechargeable, Sealed

8000 (High) / 4000 (Low)

7 hrs. (High) / 14 hrs. (Low)

24.83" (63 cm) 72.85" (185 cm) Mast Height Extended




**RoHS** Compliant

LINK >



#### 9500 Shelter Lighting System

Pelican's new **9500 Shelter Lighting System** (SLS) uses 36 (24 white, 12 red) tough LED lamp modules to instantly switch from white to night vision-safe red light.

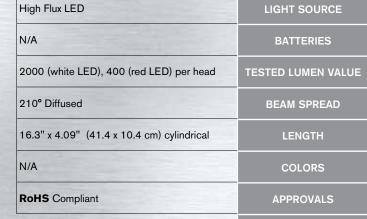

The Complete Kit includes 3 LED light heads, 12' connector cables, hanging straps and a DC/AC convertor in a Pelican Protector Case™.









MEDIUM DUTY LIGHTS	
	SabreLite™ 2000 Photoluminescent
	SabreLite™ 2000 Photoluminescent  Xenon  3 C Alkaline (Not included)  33  5 hrs.  7.79" (19.8cm)  CSA Class 1, Div 2 • UL Class 1, Div 1 FM Class 1, Div 2 • MSHA • IECEx  StealthLite™ 2400  Xenon  4 AA Alkaline (Included)
	3 C Alkaline (Not included)
	33
	5 hrs.
	7.79" (19.8cm)
LINK>	
	StealthLite™ 2400
	Xenon
	4 AA Alkaline (Included)
CAR TRANSCO	

SabreLite™ 2000 Photoluminescent	
Xenon	LIGHT SOURCE
3 C Alkaline (Not included)	BATTERIES
33	TESTED LUMEN VALUE
5 hrs.	BATTERY BURN TIME
7.79" (19.8cm)	LENGTH
	COLORS



MityLite™ 2430

4 AA Alkaline (Included)

32

4 hrs.

6.5" (16.5cm)




UL Class 1, Div 2











COLORS

APPROVALS

LENGTH

**APPROVALS** 



Xenon

4 AA NiMH (Included)

StealthLite™ Rechargeable 2450

28

4 hrs.


6.5" (16.5cm)




CSA Class 1, Div 2 FM Class 1, Div 2




#### StealthLite™ 2400 Photoluminescent

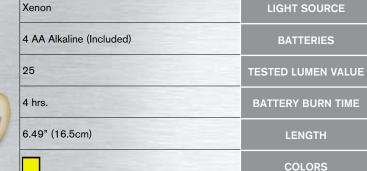





LIGHT KITS LIGHTS CATALOG | 10

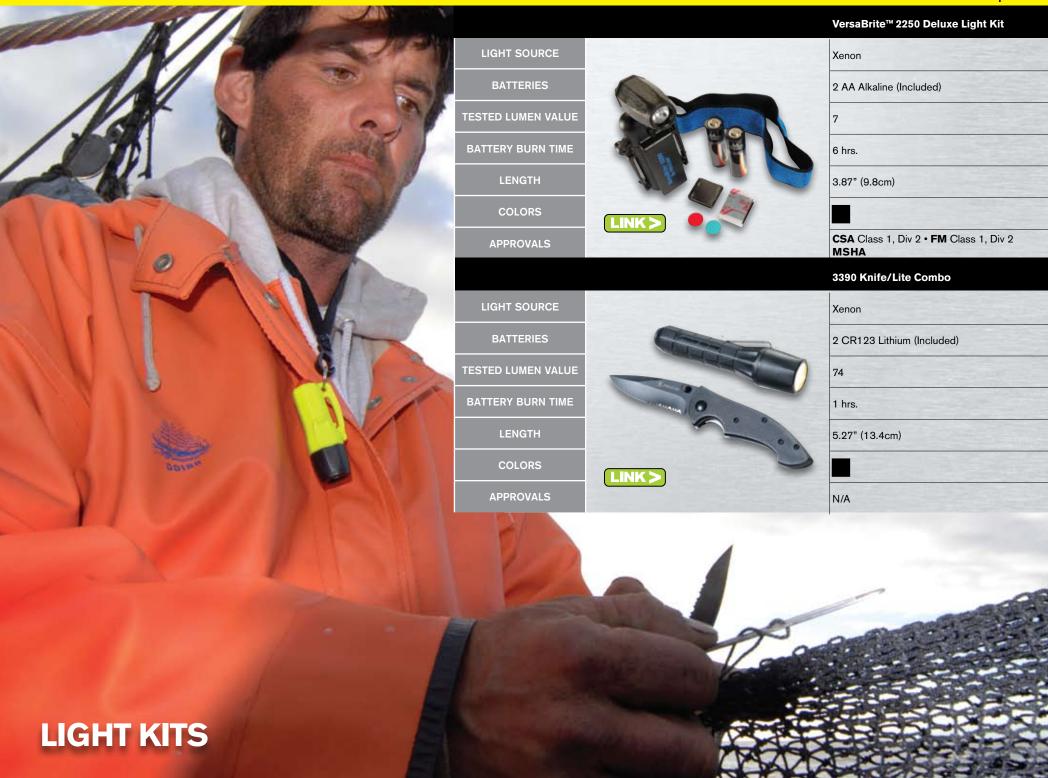

**TACTICAL/DUTY LIGHTS LIGHTS CATALOG | 11** 



LIGHT SOURCE

**BATTERIES** 

**TESTED LUMEN VALUE** 

**BATTERY BURN TIME** 

LENGTH

COLORS

**APPROVALS** 



LINK>

LINK>

PM6 3320

Xenon

2 CR123 Lithium (Included)

74

1 hrs.

5.27" (13.4cm)







N/A

#### M10 8040



**BATTERIES** 

TESTED LUMEN VALUE

**BATTERY BURN TIME** 

LENGTH

**COLORS** 

APPROVALS



Xenon

4 C Alkaline (Not included)

72

8 hrs.

11.25" (28.6cm)



CSA Class 1, Div 2 • FM Class 1, Div 2 • MSHA · IECEx





2 CR123 Lithium (Included) **BATTERIES** 

TESTED LUMEN VALUE 74

**BATTERY BURN TIME** 1 hrs.

5.51" (14cm)

COLORS



Xenon

4 C NiCad (Included)

8050 Rechargeable

151

2 hrs.

11.25" (28.6cm)



N/A



N/A

**APPROVALS** 



LIGHTS CATALOG | 13 TACTICAL/DUTY LED LIGHTS

LENGTH



PM6 3330 LED	
LED	LIGHT SOURCE
2 CR123 Lithium (Included)	BATTERIES
41	TESTED LUMEN VALUE
40 hrs.	BATTERY BURN TIME

APPROVALS N/A



### 7060 LED



LED	LIGHT SOURCE
1 3.7v, 2200mAh Lithium-Ion (Included)	BATTERIES
130	TESTED LUMEN VALUE
1.5 hrs.	BATTERY BURN TIME
8.65" (22cm)	LENGTH
	COLORS
N/A	APPROVALS






### 8060 LED



LED	LIGHT SOURCE		
4 C SIZE Ni-MH (Included)	BATTERIES		
190	TESTED LUMEN VALUE		
6 hrs.	BATTERY BURN TIME		
12.67" (32.2cm)	LENGTH		
	COLORS		
N/A	APPROVALS		



**LED AND RECOIL LIGHTS LIGHTS CATALOG | 14** L4 1830 LED WARNING LIGHT SOURCE LED **BATTERIES** 3 AAAA Alkaline (Included) TESTED LUMEN VALUE 8 **BATTERY BURN TIME** 50 hrs. LENGTH 6.2" (15.7cm) COLORS LINK> **APPROVALS** FM-US Class 1, Div 1 L1 1930 LED **LIGHT SOURCE** LED **BATTERIES** 4 LR 44 Alkaline (Included) **TESTED LUMEN VALUE BATTERY BURN TIME** 130 hrs. LENGTH 2.64" (6.7cm) **COLORS** LINK> UL Class 1, Div 1 **APPROVALS** IECEx Mini Flasher™ 2130 LED LIGHT SOURCE LED **BATTERIES** 2 L1154 Alkaline (Included) TESTED LUMEN VALUE 4.7 **BATTERY BURN TIME** 130 hrs. 1.73" (4.4cm) COLORS **LED AND RECOIL LIGHTS APPROVALS** N/A

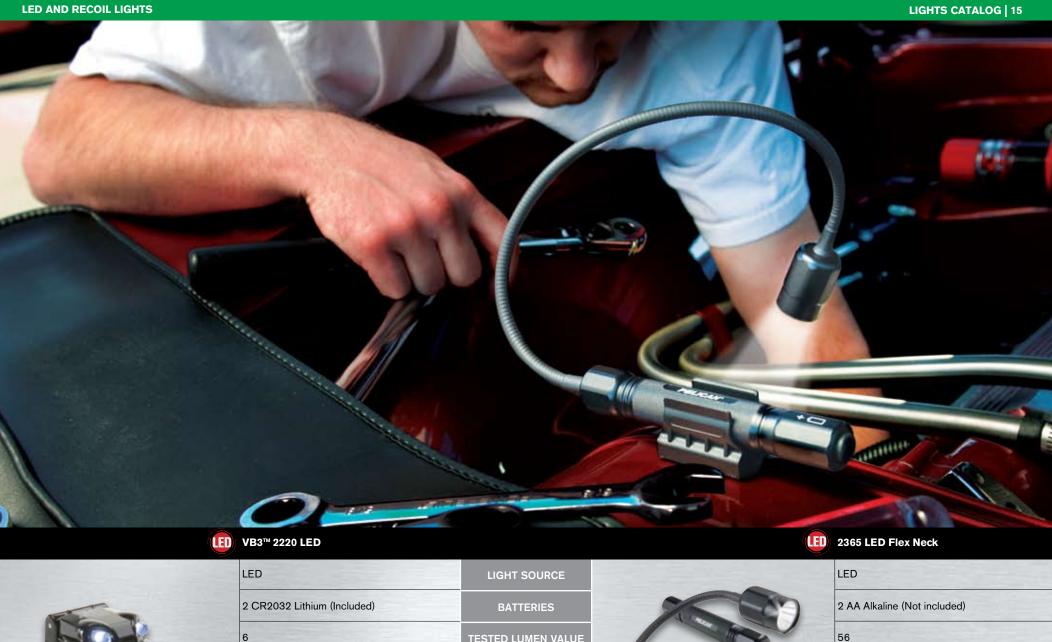



\* TRANSLUCENT COLOR

TESTED LUMEN VALUE

100 hrs.

BATTERY BURN TIME

3.5" (8.9cm)

LENGTH

COLORS

CE Ex
UL Class 1, Div 1



2 AA Alkaline (Not included)
56
7 hrs.
21.92" (55.7cm)

LED AND RECOIL LIGHTS

LIGHTS CATALOG | 16

APPROVALS

COLORS



### SabreLite™ 2010 Recoil LED™

Recoil LED LIGHT SOURCE

3 C Alkaline (Not included) BATTERIES

65 TESTED LUMEN VALUE

50 hrs. BATTERY BURN TIME

-----

8.11" (20.6cm) LENGTH

COLORS

CSA Class 1, Div 1
FM-US Class 1, Div 1
APPROVALS











Recoil LED LIGHT SOURCE

3 C Alkaline (Not included) BATTERIES

65 TESTED LUMEN VALUE

50 hrs. BATTERY BURN TIME

8.11" (20.6cm) LENGTH



CSA Class 1, Div 1 FM-US Class 1, Div 1

COLORS





#### SabreLite™ 2020 Recoil LED™



LINK>

Recoil LED LIGHT SOURCE

3 C Alkaline (Not included) BATTERIES

74 TESTED LUMEN VALUE

6 hrs. BATTERY BURN TIME

8.75" (22.2cm) LENGTH




UL Class 1, Div 1 APPROVALS




LED AND RECOIL LIGHTS

LIGHTS CATALOG | 17

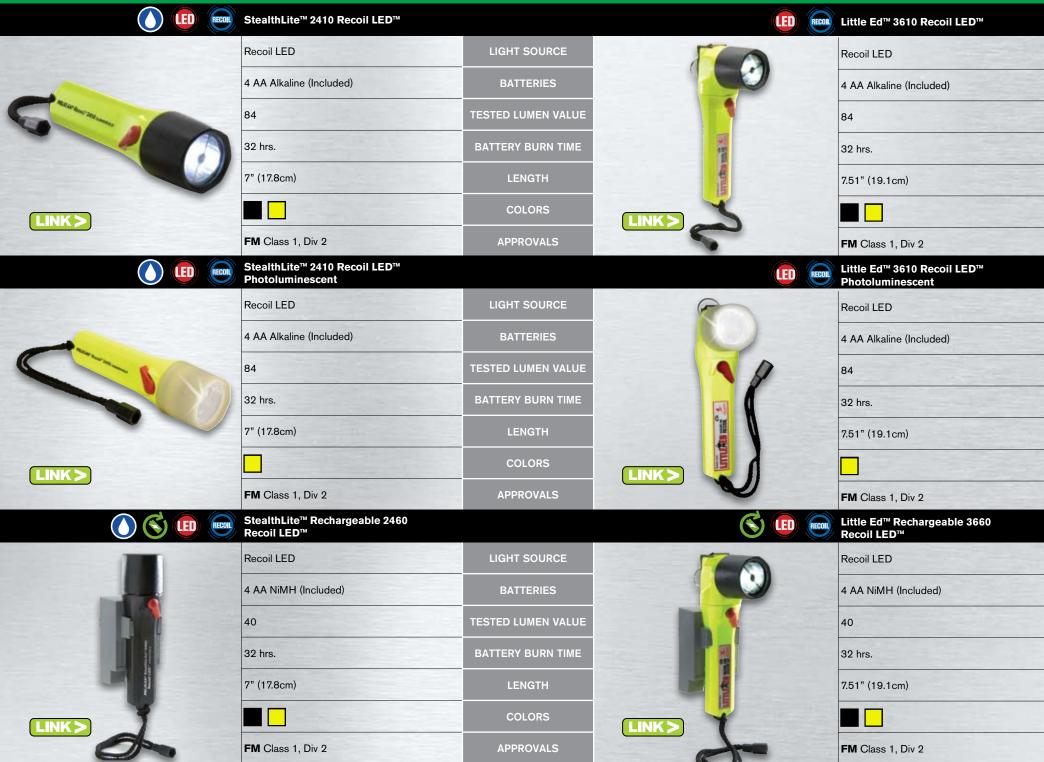

**HEADSUP LITES LIGHTS CATALOG | 18** 

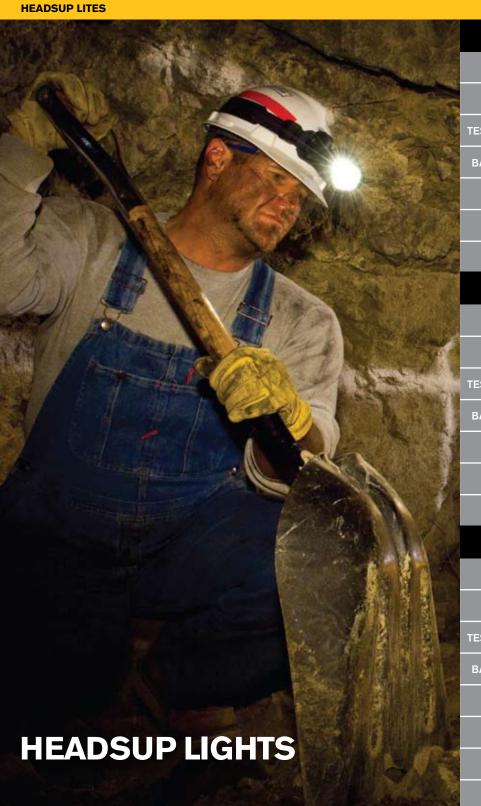



#### HeadsUp Lite™ 2600

LIGHT SOURCE

**BATTERIES** 

**TESTED LUMEN VALUE** 

**BATTERY BURN TIME** 

LENGTH

COLORS

APPROVALS



Includes cloth and rubber head straps

Krypton (Primary) Krypton (Back-up)

4 AA Alkaline (Included)

25

3 hrs. (Primary) 5 hrs. (Back-up)

3.81" (9.7cm)



CSA Class 1, Div 2 • FM Class 1, Div 2 MSHA



#### HeadsUp Lite™ 2610 LED

LIGHT SOURCE

**BATTERIES** 

TESTED LUMEN VALUE

**BATTERY BURN TIME** 

LENGTH

**COLORS** 

APPROVALS



Includes cloth and rubber head straps

LED

3 AAA Alkaline (Included)

9.0 (High) 3.0 (Low)

150 hrs. (Low) 80 hrs. (High)

1.49" (3.8cm)



UL Class 1, Div 1 • CE EX

#### HeadsUp Lite™ 2620

LIGHT SOURCE

**BATTERIES** 

TESTED LUMEN VALUE

**BATTERY BURN TIME** 

COLORS

**APPROVALS** 



Includes cloth and rubber head straps

Xenon (High) LED (Low)

3 AAA Alkaline (Included)

14.0 (High) 9.0 (Low)

80 hrs. (Low) 3 hrs. (High)

2.16" (5.5cm)



ETL Class 1, Div 1 • CE EX

**HEADSUP LITES LIGHTS CATALOG | 19** 

**APPROVALS** 

COLORS


APPROVALS

Includes cloth and rubber head straps

Halogen (High) LED (Low) LIGHT SOURCE **BATTERIES** 4 AA Alkaline (Included) 21.0 (High) / 9.0 (Low) TESTED LUMEN VALUE 3 hrs. (High) / 50 hrs. (Low) BATTERY BURN TIME 2.63" (6.7cm) LENGTH COLORS







UL Class 1, Div 2 · CE EX

HeadsUp Lite™ 2640



LIGHT SOURCE Recoil LED 4 AA Alkaline (Included) **BATTERIES** 73 TESTED LUMEN VALUE 33 hrs. **BATTERY BURN TIME** 4.64" (11.8cm) LENGTH

#### HeadsUp Lite™ 2690


FM Class 1, Div 2



Includes cloth and rubber head straps

LED LIGHT SOURCE 3 AAA Alkaline (Included) BATTERIES TESTED LUMEN VALUE 60 **BATTERY BURN TIME** 10 hrs. 2.81" (7.1cm) COLORS SGS Class 1, Div 1 · CE EX **APPROVALS** QPS · IECEX



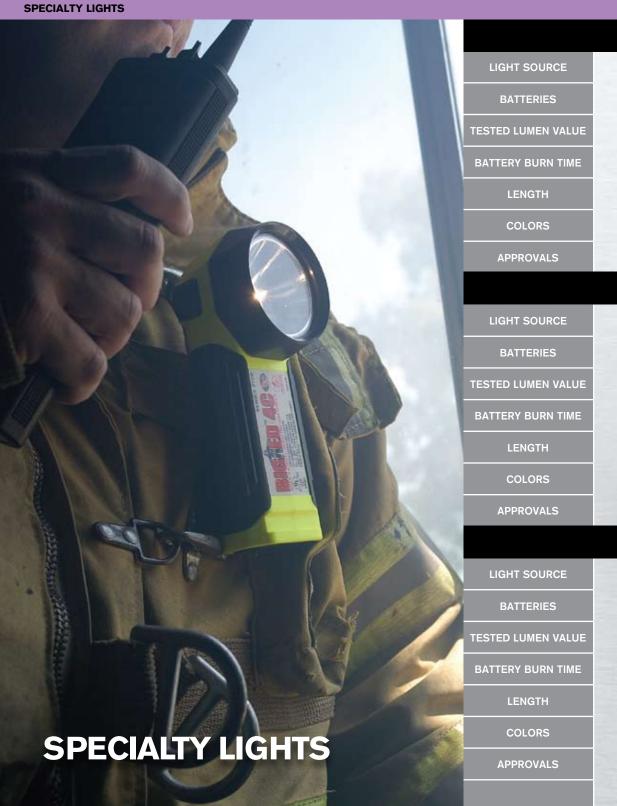

#### Big Ed™ 3700



Krypton (Primary) Krypton (Back-up)

4 C Alkaline (Not included)

48 (Primary) /18 (Back-up)

2.5 hrs. (Primary)/4 hrs. (Back-up)

7" (17.8cm)

UL Class 1, Div 2

#### Big Ed™ 3700 Photoluminescent



Krypton (Primary) Krypton (Back-up)

4 C Alkaline (Not included)

48 (Primary) /18 (Back-up)

2.5 hrs. (Primary)/4 hrs. (Back-up)

7" (17.8cm)

UL Class 1, Div 2

### Big Ed™ Rechargeable 3750



Krypton (Primary) Krypton (Back-up)

4 C NiCad (Included)

72 (Primary) /18 (Back-up)

2 hrs. (Primary)/5 hrs. (Back-up)

7" (17.8cm)



UL Class 1, Div 2

LIGHTS CATALOG | 21 **SPECIALTY LIGHTS** 



## Big Ed™ Rechargeable 3750 Photoluminescent

Krypton (Primary) Krypton (Back-up) LIGHT SOURCE

BATTERIES 4 C NiCad (Included)

72 (Primary) /18 (Back-up) TESTED LUMEN VALUE

2 hrs. (Primary)/5 hrs. (Back-up) BATTERY BURN TIME

7" (17.8cm) LENGTH

UL Class 1, Div 2 APPROVALS



#### Big D™ Rechargeable 3850 Lead Acid



Xenon (Primary) Xenon (Back-up) LIGHT SOURCE

1 Sealed Lead Acid (Included) **BATTERIES** 

600 (Primary) / 290 (Back-up) TESTED LUMEN VALUE

1 hrs. (Primary)/2 hrs. (Back-up) **BATTERY BURN TIME** 

8.5" (21.6cm) LENGTH



COLORS

**UL** Class 1, Div 2 APPROVALS



#### Big D™ Rechargeable 3850 NiMH

6 D NiMH (Included)



LIGHT SOURCE Xenon (Primary) Xenon (Back-up)

BATTERIES

600 (Primary) / 290 (Back-up) TESTED LUMEN VALUE

**BATTERY BURN TIME** 1.5 hrs. (Primary)/2.5 hrs. (Back-up)


COLORS

9.5" (24.1cm)



**APPROVALS** UL Class 1, Div 2



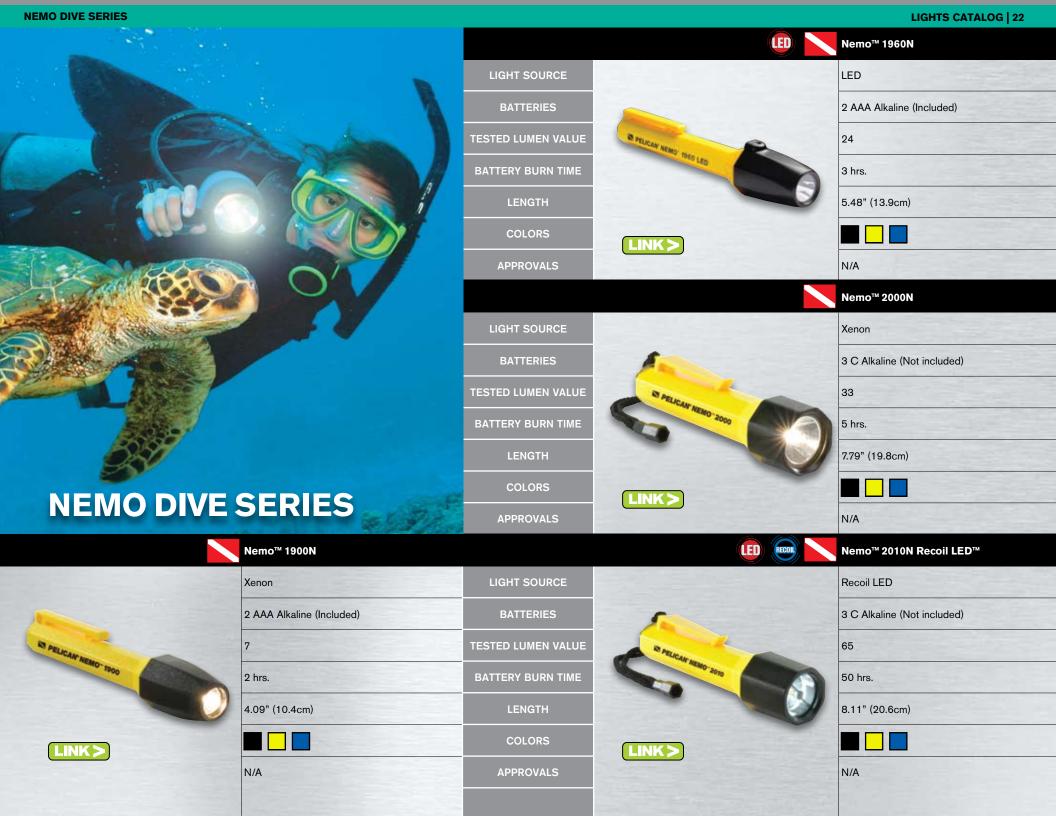





**LIGHT MOUNTING SYSTEMS** LIGHTS CATALOG | 25

#### **610 FRONT SIGHT MOUNT**

Fits Pelican Lights -2320, 2330, 2390 Includes Remote Pressure Switch For use with: AR15, M16, and M4 Carbine



M4 Carbine



#### **630 FOREGRIP MOUNT**

Fits Pelican Lights -2320, 2330, 2390 Includes Remote Pressure Switch. For use with: Heckler, and Koch MP5



#### 2326 REMOTE PRESSURE SWITCH Fits Pelican Lights -2320, 2330, 2390 COLOR: Black • WT.: 2.0 oz.



Our tactical pressure switch replaces the standard tailcap on the flashlight. A 6" cord attached to a 2" pressure-sensitive mounts to the foregrip.

#### **620 SIDE SLING MOUNT**

Fits Pelican Lights -2320, 2330, 2390 Includes Remote Pressure Switch. For use with: AR15, M16, and



### **HOLSTERS**

#### 2327 CORDURA® HOLSTER

Fits Pelican Lights -MityLite™ 2300 M6 2320 M6 2330 LED M6 3W 2390 LED

#### 2357 CORDURA® HOLSTER

Fits Pelican Lights -MityLite™ 2340 MityLite™ 2340NVG

#### 2407 CORDURA® HOLSTER

Fits Pelican Lights -StealthLite™ 2400 StealthLite™ 2400NVG StealthLite™ 2400 Photoluminescent Nemo™ 2400 StealthLite™ Rechargeable 2450 StealthLite™ 2410 StealthLite™ 2410 Recoil LED™ StealthLite™ 2410 Photoluminescent Nemo™ 2410 Recoil LED™ StealthLite™Rechargeable 2460 Recoil LED™

#### 7057 CORDURA® HOLSTER

Fits Pelican Lights -M9 Rechargeable 7050

7076 Plain Holster for 7060 LED 7078 Cordura® Holster for 7060 LED 7079 Basketweave Holster for 7060 LED 8057 CORDURA® HOLSTER

Fits Pelican Lights-8040 M10 8040 8050 M11 Rechargeable 8050 8060 LED Flashlight



#### **MISCELLANEOUS**

#### 100 THE PELICAN™ FLOAT **Marker Recovery System**



The Pelican Float is a reusable buoy made of structural high visibility foamed resin and weighs only 16 oz. Includes over 100 ft. of polyethylene 225 lb. test line and a 6 oz. non-drag dispatchable anchor. Shipping weight: 1.2 lbs.



HELMET LIGHT HOLDERS LIGHTS CATALOG | 26

#### 770 UNIVERSAL HELMET LIGHT HOLDER

Fits most known helmet designs and functions with 17 different Pelican flashlights. Tough polymer construction with brass inserts and stainless steel hardware.

Fits the Following Pelican Lights:

- MityLite™ 2300 M6 2320 M6 2330 LED
- MityLite™ 2340 & 2340NVG M6 3W 2390 LED
- StealthLite<sup>™</sup> 2400, 2400NVG & 2400PL Photoluminescent
- StealthLite<sup>™</sup> 2410 Recoil LED<sup>™</sup> & 2410PL Recoil LED<sup>™</sup> Photoluminescent MityLite<sup>™</sup> 2420 MityLite<sup>™</sup> 2430
- StealthLite™ Rechargeable 2450
- StealthLite™ Rechargeable 2460 Recoil LED™
- PM6 3320 PM6 3330 LED
- Other Helmet Light Holders availble (see chart below)



### 3340 PM6 HELMET LIGHTING SYSTEM

Includes PM6 3320 and Universal Helmet

Light Holder 770.

Also available: CAT. NO. 3350

(same as 3340 but with PM6 3330 LED)



PELICAN FLASHLIGHT	Cat. #700	Cat. #710	Cat. #711	Cat. #712	Cat. #722	Cat. #750	Cat. #760
1900 & 1900NVG							
2140							•
2200							
2250	•						
2300							
2340 & 2340NVG						•	
2400 & 2400NVG							
2400PL	-		-	-		-	•
2410							
2410PL	-		-	-		-	-
2420							
2430	-						-
2450							
2460							

### > THE ANATOMY OF A SAFETY **APPROVED FLASHLIGHT**




Н	HAZARDOUS AREA ELECTRICAL GUIDELINES									
	SUBSTANCE	TYPICAL ENVIRONMENTS	CLASSIFICATIONS	VOLATILITY						
CLASS 1	Flammable Gases, Vapors, or Liquids	Oil Refinery Paint Warehouse	<b>Division 1</b> (Hazard Likely)	MOST						
CLASS I	(Acetylene, Hydrogen, Ethylene, Propane)	Spray Booth Offshore Oil Rig	<b>Division 2</b> (Hazard Not Likely)							
CLASS 2	Combustible Dusts	Coal Mine Munitions Factory	<b>Division 1</b> (Hazard Likely)							
CLASS 2	(Metals [Div. 1 only], Coal, Grain)	Grain Silo Hay Storage Facility	Division 2 (Hazard Not Likely)							
CLACCA	Ignitable Fibers &	Paper Mill Woodworking Facility	<b>Division 1</b> (Hazard Likely)							
CLASS 3	Flyings (Machined Magnesium)	Textile Mill Cotton Gin	Division 2 (Hazard Not Likely)	LEAST						

#### Division 1:

Where volatile substances can exist all of the time or some of the time under normal operating conditions.

#### **Division 2:**

Where volatile substances are not likely to exist under normal operating conditions.

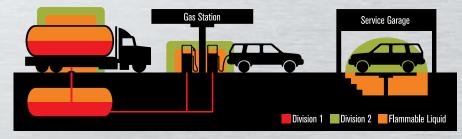

### WHAT IT MEANS TO HAVE SAFETY APPROVAL

Products must pass a series of rigorous tests conducted by safety agencies before getting stamps of approval. When you're in a potentially hazardous environment, using a flashlight that carries the appropriate hazardous approvals is vital.





Factory Mutual



Mine Safety Canadian Safety Health Administration Health Administration



Electrotechnical Commission

**IEC**EX



ATEX Europe



Urban Search **Electrical Testing** and Rescue Laboratories



SGS U.S. Testing Company



**Electrical Safety** 

										LIGHTS CATA	LOG   28
	Cat No.	Model Name	Light Source	Batteries	Tested Lumen Value	Watts	Battery Burn Time	Approvals	Length	Weight with Batteries	Colors
1	9430	9430 Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	1000 (Low) 2000 (High)	24	15. hrs. (Low) 8 hrs. (High)	RoHS Compliant	15.75" (40 cm)	22.05 lbs. (10 kg)	■□
	9450B	9450B Remote Area Lighting System	LED	1 Rechargeable Sealed Lead (500 cycles, IATA approved) (Included)	1280	16	17 hrs. (Total) 9 hrs (Peak)	RoHS Compliant	22" (55.9 cm)	46 lbs. (20.87 kg)	••
0	9460	9460 Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	2000 (Low) 4000 (High)	48	14 hrs. (Low) 7 hrs. (High)	RoHS Compliant	22" (55.9 cm)	50.71 lbs. (23 kg)	
	9470	9470 Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	4000 (Low) 8000 (High)	96	14 hrs. (Low) 7 hrs. (High)	RoHS Compliant	24.83" (63 cm)	88.18 lbs. (40 kg)	
	9500	9500 Shelter Lighting System	High Flux LED	12v Primary Socket	400 (Red LED) 2000 (White LED)	24	N/A	RoHS Compliant	Head Length 16.3" (41.4 cm)	29.8" (13.52 kg)	
	1900	MityLite <sup>™</sup> 1900	Xenon	2 AAA Alkaline (Included)	7	1.1	2 hrs.	⊕ .⊕. IECex	4.09" (10.4 cm)	1.6 oz. (0.05 kg)	
*(0)	2140	Tracker <sup>™</sup> 2140	Xenon	2 AAA Alkaline (Included)	8	1.2	3 hrs.	Obsert Div. 2	3.5" (8.9 cm)	1.8 oz. (0.05 kg)	
-	2300	MityLite <sup>™</sup> 2300	Xenon	2 AA Alkaline (Included)	8	1.8	4 hrs.		5.62" (14.3 cm)	3.4 oz. (0.1 kg)	
	2340	MityLite <sup>™</sup> 2340	Xenon	2 AA Alkaline (Included in select packaging)	8	1.8	4 hrs.	® <n> ■SIA ⊕ interior</n>	6.25" (15.9 cm)	3.5 oz. (0.1 kg)	
40	1800	PeliLite <sup>™</sup> 1800	Xenon	2 C Alkaline (Not included)	15	2.2	8 hrs.	(F) <po (ii)="" client="" i="" misha<="" th=""><th>6" (15.2 cm)</th><th>7.8 oz. (0.22 kg)</th><th></th></po>	6" (15.2 cm)	7.8 oz. (0.22 kg)	
	1820	Pocket Sabre <sup>™</sup> 1820	Xenon	2 C Alkaline (Included in select packaging)	15	2.2	8 hrs.	⑤ ← ① CHING! IECEX	5.83" (14.8 cm)	8.3 oz. (0.24 kg)	
	2000	SabreLite <sup>™</sup> 2000	Xenon	3 C Alkaline (Not included)	33	3.3	5 hrs.	③ ← ⊕ ⊕ diest   IIIIA   IECEX	7.79" (19.8 cm)	12.8 oz. (0.36 kg)	

										LIGHTS CATA	LOG   29
	Cat No.	Model Name	Light Source	Batteries	Tested Lumen Value	Watts	Battery Burn Time	Approvals	Length	Weight with Batteries	Colors
S	2000PL	SabreLite <sup>™</sup> 2000 Photoluminescent	Xenon	3 C Alkaline (Not included)	33	3.3	5 hrs.	③ ← CINSTA IECEX	7.79" (19.8 cm)	12.8 oz. (0.36 kg)	
600	2400	StealthLite <sup>™</sup> 2400	Xenon	4 AA Alkaline (Included)	25	3.2	4 hrs.	SP <™ MSHA @ at last last last last last last last l	6.49" (16.5 cm)	7.1 oz. (0.2 kg)	
	2400PL	StealthLite <sup>™</sup> 2400 Photoluminescent	Xenon	4 AA Alkaline (Included)	25	3.2	4 hrs.	F IMSHA COLOR	6.49" (16.5 cm)	7.1 oz. (0.2 kg)	
<b>COO</b>	2430	MityLite <sup>™</sup> 2430	Xenon	4 AA Alkaline (Included)	32	3.7	4 hrs.	Class I Div. 2	6.5" (16.5 cm)	6.1 oz. (0.17 kg)	
	2450	StealthLite <sup>™</sup> Rechargeable 2450	Xenon	4 AA NIMH (Included)	28	2.6	4 hrs.	<b>⊕</b> ≪•>	6.5" (16.5 cm)	7.8 oz. (0.22 kg)	
	2320	M6 2320	Xenon	2 CR123 Lithium (Included)	74	7.8	1 hr.	N/A	5.51" (14 cm)	5.6 oz. (0.16 kg)	
	3320	PM6 3320	Xenon	2 CR123 Lithium (Included)	74	7.8	1 hr.	N/A	5.27" (13.4 cm)	3.45 oz. (0.1 kg)	
	8040	M10 8040	Xenon	4 C Alkaline (Not Included)	72	4.8	8 hrs.		11.25" (28.6 cm)	18.4 oz. (0.52 kg)	
	8050	M11 Rechargeable 8050	Xenon	4 C NiCad (Included)	151	9.12	2 hrs.	N/A	11.25" (28.6 cm)	17.92 oz. (0.51 kg)	
3000	2330	M6 2330 LED	LED	2 CR123 Lithium (Included)	41	1	40 hrs.	N/A	5.51" (14 cm)	5.5 oz. (0.16 kg)	
-	2360	M5 2360 LED	LED	2 AA ALKALINE (Not included)	95	2.5	2 hrs.	N/A	6.1" (15.5 cm)	4.6 oz. (0.13 kg)	
	2390	M6 3W 2390 LED	LED	2 CR123 Lithium (Included)	180	3	5 hrs.	N/A	5.31" (13.5 cm)	5.6 oz. (0.16 kg)	
	3330	PM6 3330 LED	LED	2 CR123 Lithium (Included)	41	1	40 hrs.	N/A	5.27" (13.4 cm)	3.45 oz. (0.1 kg)	
	7060	7060 LED	LED	1 3.7v, 2200mAh Lithium-lon (Included)	130	4.4	1.5 hrs.	N/A	8.65" (22 cm)	10.4 oz. (0.29 kg)	
	8060	8060 LED	LED	4 C SIZE Ni-MH (Included)	190.0	3.7	6 hrs.	N/A	12.67" (32.2 cm)	23.2 oz. (0.66 kg)	
	1830	L4 1830 LED	LED	3 AAAA Alkaline (Included)	8	0.7	50 hrs.	US FM Class 1,	6.2" (15.7 cm)	1.2 oz. (0.03 kg)	
	1930	L1 1930 LED	LED	4 LR 44 Alkaline (Included)	9	0.2	130 hrs.	Class I IECEX	2.64" (6.7 cm)	0.9 oz. (0.03 kg)	
2	2010	SabreLite <sup>™</sup> 2010 Recoil LED <sup>™</sup>	Recoil LED	3 C Alkaline (Not Included)	65	1	50 hrs.	Class I Class I, Class I, Class I,	8.11" (20.6 cm)	13.4 oz. (0.38 kg)	
5	2010PL	SabreLite <sup>™</sup> 2010 Recoil LED <sup>™</sup> Photoluminescent	Recoil LED	3 C Alkaline (Not included)	65	1	50 hrs.	Class I grade Div. 1	8.11" (20.6 cm)	13.4 oz. (0.38 kg)	
3	2365	2365 Flex-Head Flashlight	LED	2 AA Alkaline (Not included)	56	1	7 hrs.	N/A	21.92" (55.7 cm)	9.3 oz. (0.26 kg)	

										LIGHTS CATA	Loa   30
	Cat No.	Model Name	Light Source	Batteries	Tested Lumen Value	Watts	Battery Burn Time	Approvals	Length	Weight with Batteries	Colors
1	2020	SabreLite <sup>™</sup> 2020 Recoil LED <sup>™</sup>	Recoil LED	3 C Alkaline (Not included)	74	1	6 hrs.	Class I On 1	8.75" (22.2 cm)	14.7 oz. (0.42 kg)	•
•	2130	Mini Flasher <sup>™</sup> 2130 LED	LED	2 L1154 Alkaline (Included)	4.7	0.5	130 hrs.	N/A	1.73" (4.4 cm)	0.5 oz. (0.01 kg)	
	2220	VB3 <sup>™</sup> 2220 LED	LED	2 CR2032 Lithium (Included)	6	0.6	100 hrs.	CEEX Class I	3.5" (8.9 cm)	1 oz. (0.03 kg)	
500	2410	StealthLite <sup>™</sup> 2410 Recoil LED <sup>™</sup>	Recoil LED	4 AA Alkaline (Included)	84	1	32 hrs.	< <del>®</del> >	7" (17.8 cm)	7.3 oz. (0.21 kg)	
	2410PL	StealthLite <sup>™</sup> 2410 Recoil LED <sup>™</sup> Photoluminescent	Recoil LED	4 AA Alkaline (Included)	84	1	32 hrs.	<b>⊕</b>	7" (17.8 cm)	7.3 oz. (0.21 kg)	
	2460	StealthLite <sup>™</sup> Rechargeable 2460 Recoil LED <sup>™</sup>	Recoil LED	4 AA NiMH (Included)	40	1	32 hrs.	<b>₹</b>	7" (17.8 cm)	7.8 oz. (0.22 kg)	■□
n	3610	Little Ed <sup>™</sup> 3610 Recoil LED <sup>™</sup>	Recoil LED	4 AA Alkaline (Included)	84	1	32 hrs.	<b>€®&gt;</b>	7.51" (19.1 cm)	10.5 oz. (0.3 kg)	
S	3610PL	Little Ed <sup>™</sup> 3610 Recoil LED <sup>™</sup> Photoluminescent	Recoil LED	4 AA Alkaline (Included)	84	1	32 hrs.	<b>®</b> >	7.51" (19.1 cm)	10.5 oz. (0.3 kg)	
4	3660	Little Ed <sup>™</sup> Rechargeable 3660 Recoil LED <sup>™</sup>	Recoil LED	4 AA NIMH (Included)	40	1	32 hrs.	<®>	7.51" (19.1 cm)	10.56 oz. (0.3 kg)	
	2600	HeadsUp Lite <sup>™</sup> 2600	Krypton	4 AA Alkaline (Included)	25	4.5 (Primary) 3 (Back-up)	3 hrs. (Primary) 5 hrs. (Back-up)	∯ <ŵ> MSHA	3.81" (9.7 cm)	9.7 oz. (0.27 kg)	-
	2610	HeadsUp Lite <sup>™</sup> 2610 LED	LED	3 AAA Alkaline (Included)	3.0 (Low) 9.0 (High)	0.135 (Low) 0.405 (High)	150 hrs. (Low) 80 hrs. (High)	CEEX OF Chase I	1.49" (3.8 cm)	3.2 oz. (0.09 kg)	-
	2620	HeadsUp Lite <sup>™</sup> 2620	Xenon/ LED	3 AAA Alkaline (Included)	9.0 (Low) 14.0 (High)	0.405 (Low) 1.53 (High)	80 hrs. (Low) 3 hrs. (High)	CEEN NO GEST.	2.16" (5.5 cm)	4.8 oz. (0.14 kg)	
0	2640	HeadsUp Lite <sup>™</sup> 2640	Halogen/ LED	4 AA Alkaline (Included)	9.0 (Low) 21.0 (High)	0.54 (Low) 3.48 (High)	50 hrs. (Low) 3 hrs. (High)	CEEX Dates I	2.63" (6.7 cm)	10.9 oz. (0.31 kg)	
2	2680	HeadsUp Lite <sup>™</sup> 2680 Recoil LED™	Recoil LED	4 AA Alkaline (Included)	73	1	33 hrs.	<pn></pn>	4.64" (11.8 cm)	9.7 oz. (0.27 kg)	
	2690	HeadsUp Lite™ 2690	LED	3 AAA Alkaline (Included)	60.0	1	10 hrs.	IECEX ( € (EX)  QPS (Quantity)  Disc. 1	2.81" (7.1 cm)	4.1 oz. (0.12 kg)	

										LIGHTS CATAL	OG   31
	Cat No.	Model Name	Light Source	Batteries	Tested Lumen Value	Watts	Battery Burn Time	Approvals	Length	Weight with Batteries	Colors
	3700	Big Ed <sup>™</sup> 3700	Krypton	4 C Alkaline (Not included)	48	7.2 (Primary) 4.5 (Back-up)	2.5 hrs. (Primary) 4 hrs. (Back-up)	Class I Div. 2	7" (17.8 cm)	20.32 oz. (0.58 kg)	
	3700PL	Big Ed <sup>™</sup> 3700 Photoluminescent	Krypton	4 C Alkaline (Not included)	48	7.2 (Primary) 4.5 (Back-up)	2.5 hrs. (Primary) 4 hrs. (Back-up)	(Up) Class I Div. 2	7" (17.8 cm)	20.32 oz. (0.58 kg)	
	3750	Big Ed <sup>™</sup> Rechargeable 3750	Krypton	4 C NiCad (Included)	72	8.2 (Primary) 3.5 (Back-up)	2 hrs. (Primary) 5 hrs. (Back-up)	Ulass I Ow. 2	7" (17.8 cm)	20.48 oz. (0.58 kg)	
	3750PL	Big Ed <sup>™</sup> Rechargeable 3750 Photoluminescent	Krypton	4 C NiCad (Included)	72	8.2 (Primary) 3.5 (Back-up)	2 hrs. (Primary) 5 hrs. (Back-up)	Ulass I Ow. 2	7" (17.8 cm)	20.48 oz. (0.58 kg)	
	3850LA	Big D <sup>™</sup> Rechargeable 3850 Lead Acid	Xenon	1 Sealed Lead Acid (Included)	600	24 (Primary) 11 (Back-up)	1 hr. (Primary) 2 hrs. (Back-up)	Ulass I Dw. 2	8.5" (21.6 cm)	62.08 oz. (1.76 kg)	
	3850N	Big D <sup>™</sup> Rechargeable 3850 NiMH	Xenon	6 D NiMH (Included)	600	24 (Primary) 11 (Back-up)	1.5 hrs. (Primary) 2.5 hrs. (Back-up)	Ulass I Ow. 2	9.5" (24.1 cm)	56.1 oz. (1.59 kg)	
	1900N	Nemo <sup>™</sup> 1900	Xenon	2 AAA Alkaline (Included)	7	1.1	2 hrs.	N/A	4.09" (10.4 cm)	1.6 oz. (0.05 kg)	
	1960N	Nemo <sup>™</sup> 1960	LED	2 AAA Alkaline (Included)	24	0.5	3 hrs.	N/A	5.48" (10.4 cm)	1.9 oz. (0.05 kg)	
60	2000N	Nemo <sup>™</sup> 2000	Xenon	3 C Alkaline (Not included)	33	3.3	5 hrs.	N/A	7.79" (19.8 cm)	12.8 oz. (0.36 kg)	
	2010N	Nemo <sup>™</sup> 2010 Recoil LED <sup>™</sup>	Recoil LED	3 C Alkaline (Not included)	65	1	50 hrs.	N/A	8.11" (20.6 cm)	13.4 oz. (0.38 kg)	
500	2410N	Nemo™ 2410 Recoil LED™	Recoil LED	4 AA Alkaline (Included)	84	1	32 hrs.	N/A	7" (17.8 CM)	7.3 oz. (0.21 KG)	
<	2400N	Nemo <sup>™</sup> 2400	Xenon	4 AA Alkaline (Included)	25	3.2	4 hrs.	N/A	6.49" (16.5 cm)	7.1 oz. (0.2 kg)	
5	4300N	Nemo <sup>™</sup> 4300	Xenon	8 C Alkaline (Not included)	276	13.8	4 hrs.	N/A	7.5" (19 cm)	36.64 oz. (1.04 kg)	
	4000	KingLite <sup>™</sup> 4000	Xenon	8 D Alkaline (Not included)	251	14.4	12 hrs.	<b>⊕</b> <₽M>	9.37" (23.8 cm)	74.08 oz. (2.1 kg)	



### > PRIVATE LABEL

Pelican Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Pelican light. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable epoxy inks and foils in our screening, hot tipping, embossing, and molding programs.



### GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.



### HOT STAMPING DEPARTMENT

Our hot stamping department, equipped with the latest technology in custom imprinting. Minimum quantities apply.



### 100% ACCURACY Pelican's strict QA

inspection team will check for quality of print and 100% accuracy in color and placement.



### MEET THE OTHER HALF OF PELICAN

#### STRONGER BY DESIGN

Pelican Protector™ Cases are made with Copolymer Polypropylene, using an open cell core and solid wall construction, which is actually stronger and lighter than the solid core wall that our competitors produce. Travel light with heavy protection. And you know it's a Pelican™ Case by the distinctive dual band top surface. Stainless steel pins are used for hinges and handles. The Double-Throw latches are smarter and easier to open: it's the classic "C" clamp design with a secondary movement that works like a pry bar to start the release and offers plenty of leverage to open with a light pull.



#### WATERTIGHT

The secret is the tongue-and-groove fit with a Polymer o-ring acting as a waterproof seal. Also, the new Automatic Pressure Equalization Valve releases built-up air pressure while keeping water molecules out, resulting in a watertight case that is even easier to open.



Stainless steel reinforced padlock protectors provide added strength and extra security against cutting and theft.



# PANEL FRAME MOUNTING SYSTEM Pelican offers an easy

solution for installing interface panels to most Pelican Protector Cases.
Our mounting bracket

installs beneath your panel and fits against stops molded inside the case walls. With pre-drilled holes and stainless steel screws, fabricating a custom case is faster, stronger, and more accurate.



### EXTRA PROTECTION

Pelican's Pick N Pluck™ foam and versatile padded divider sets are available for cushion

and extra protection. For a better fit, our engineers will map the layout of your equipment for custom foam inserts. Just send a CAD drawing of the part and we'll die cut the foam insert and install it in a matching case.

#### PELICAN LEGENDARY LIFETIME GUARANTEE OF EXCELLENCE

Pelican Products, Inc. guarantees its products for a lifetime against breakage or defects in workmanship. Pelican™ injection molded cases are guaranteed to be watertight to a depth of 3.3 feet (1 meter) for 30 minutes (IP 67) unless otherwise stated if properly closed with undamaged o-ring in place. Pelican's liability is limited to the case and not its contents or foam. This guarantee does not cover the lamp or batteries (rechargeable or alkaline) for lights. Any liability, either expressed or implied, is limited to replacement of the product. This guarantee is void if the Pelican product has been abused beyond normal and sensible wear and tear. This guarantee does not cover shark bite, bear attack or damage caused by children under five.

#### U.S.A.

#### TO ORDER PELICAN LIGHTS AND CASES IN THE USA:

#### **TORRANCE**

23215 Early Avenue Torrance, CA 90505 USA Tel: 310.326.4700 800.473.5422 Fax: 310.326.3311 TO ORDER PELICAN STORM OR PELICAN HARDIGG CASES IN THE USA:

#### DEERFIELD

147 North Main Street South Deerfield, MA 01373 Tel: 800.542.7344 Fax: 413.665.8330 www.pelican.com

#### INDIANA

3802 N 600 W # B Greenfield, IN 46140-9642 Tel: 317.866.2040 www.pelican.com

#### INTERNATIONAL

www.pelican.com

#### **CANADA**

Pelican Products, Inc. 10221-184th Street Edmonton, Alberta T5S 2J4 Canada Tel: 780.481.6076 Fax: 780.481.9586 www.pelican.ca

#### EUROPE, MIDDLE EAST & AFRICA

Peli Products, S.L. c/ Casp, 33-B Pral. 08010 • Barcelona, Spain Tel +34 934 674 999 Fax +34 934 877 393 www.peli.com

#### JAPAN

Pelican Products K.K.
Suntec Bldg. 7F
2-2-7 Honcho, Funabashi-shi
Chiba 273-0005 Japan
Tel +81(0)47.433.7715
Fax +81(0)47.433.7882
www.pelicanproducts.jp

#### **AUSTRALIA**

Pelican Products Australia P/L
Suite 2.33, West Wing, Platinum Bldg.
Erina NSW 2250
Australia
Tel: +612 4367 7022
Fax: +612 4367 7066
www.pelicanaustralia.com

#### CHINA

Pelican Products China
Pine City Building, Room 1026
777 Zhaojiabang Road
Shanghai, China 200032
Tel +86.21.64189685
Fax +86.21.64189679
www.pelican.com/cn



©2009 Pelican Products, Inc. All trademarks and logos displayed herein are registered and unregistered trademarks of Pelican Products, Inc. and others.

Part No. 0030-000-300 OC.09

**DISTRIBUTED BY:** 

Cordura® is a registered trademark of INVISTA Lexan® is a registered trademark of SABIC